



MAVS-4 Vector Averaging 3-Axis Acoustic Current Meter

The **MAVS Current Meter** is a true 3-axis Acoustic Current Meter which employs a differential travel time measurement technique. The current meter takes measurements across 4 acoustic axes to provide a true vector averaged velocity measurement. Programmable burst mode and triggered sampling provide the most flexible current meter available.

The combination of small sensor geometry and differential travel time technique provide unsurpassed resolution and accuracy. The small transducer size significantly reduces the disturbance to water flow. While the standard range of measurement is 200 cm/sec, low speed measurement accuracy in the 0.03 cm/sec to 10 cm/sec range is preserved.

MAVS-4 uses a terminal emulator interface such as *HyperTerminal* or *CrossCut* for getting real time data and downloading and archiving data to a PC. Software such as *MATLAB* or *Excel*, etc. may be used for tabular display and graphing data.

MWAVES software is available for directional wave spectra.

The **MAVS-4** employs a faired sensor head design with central strut and a 9.5 cm acoustic path length. The controller is an Onset Tattletale 8 which is mounted by a connector beneath the main circuit board. A battery pack comprising 18 AA alkaline cells provides the necessary power to the instrument. A 4 pin connector on the top end cap permits external power to be applied and provides TTL level, RS-232 or RS-485 communication capability.


Options:

- Tilt sensor
- Wave direction
- Temperature sensor
- Conductivity sensor
- Pressure sensor
- Turbidity sensor
- Deep water housing
- Compact Flash logging memory available from 8 to 512 Mbyte



Features:

- Unsurpassed resolution and accuracy
- True 3 axis acoustic velocity measurement
- Field proven sensor technology
- No moving parts to foul
- Multi-mode, vector averaging or event driven sampling
- Excellent vertical cosine response
- Differential travel time measuring technique
- Internal recording or direct reading
- Accuracy unaffected by tilt or mooring motion
- Internal real time clock
- Digital coms via 5 Volt TTL, RS-232 or RS-485
- Temperature measurement

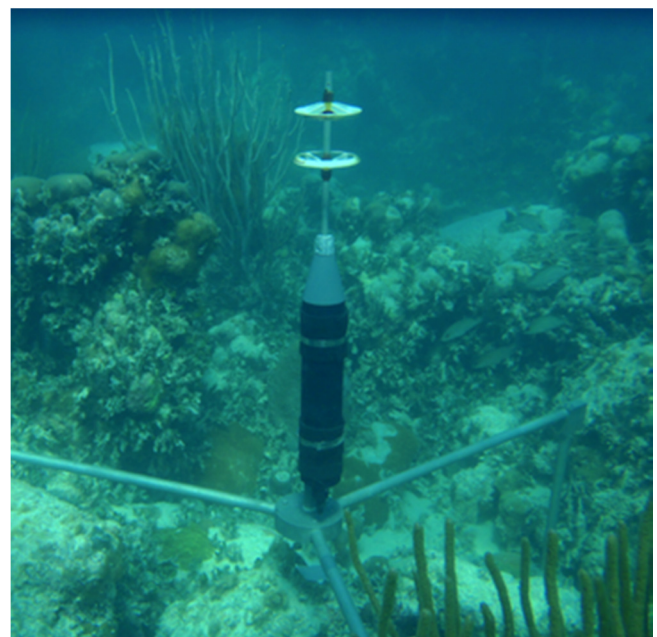

SPECIFICATIONS

Parameter	Accuracy	Resolution	Range
Speed	0.3 cm/sec	0.03 cm/sec	200 cm/sec (optional ranges available)
Direction	+/- 2°	1°	360°
Temperature	0.1° C	0.03° C	-5 to 45° C
Conductivity	0.2 mS/cm	0.02 mS/cm	0 to 75 mS/cm
Pressure	0.5% F.S*	0.024% F.S.	15, 30, 60, 450, 3,000, 7,500 & 10,000 PSI
Tilt	2°	0.1°	20° (45° optional)

* 0.04 or 0.08% optional

Drift: 0.15 cm/sec per month

Measurement Technique: Differential travel time, 3 axis

Acoustic Paths: 4 measured, 4 used

Internal Recording Memory: 16, 32, 48, 64, 96, 128, 160, 192, 256, 300, 512 Mbyte compact flash card

Memory Usage: Dependent on sampling method and size of memory installed

Communications: TTL, RS-232 or RS-485 @ 38,400 baud maximum 115.2 K baud

Sampling Rates: 10 Hz in Earth Coordinates (resolved to V_e , V_n , V_{up}) or
15 Hz in instrument coordinates
25 Hz Raw Data, No Compass, No Options

Operating Modes: Burst Mode (programmed for timed sampling)
Vector Averaging
Externally Triggered Sample
Continuous Sampling

Data Record Size: Standard Instrument: 32 bytes per record for Day, Hour, Min, Sec, T, Tilt, V_e , V_n , V_u
Recorded as Binary and transmitted as ASCII CSV with CR LF

Depth: 2000m or 6000m.

Dimensions: **Cylinder Diameter:** 83mm
Overall Length: 635mm


Weight: **Water:** 1.2 kg. / **Air:** 2.3 kg

Mooring Frame: 900 kg. Optional 4500 kg. available

Sea Cable: RS-485 or RS-232 (others on request)

Software: Terminal Emulator: Hyper-terminal, Crosscut or Tattleterm
Optional Graphical Software available upon request (MWAVES)

Power: **Recording:** 13.5 Vdc, 18 AA Alkaline batteries, @ 4.8 Ah, or LiSOCl₂ 14.4 Vdc @ 8.8 Ah
Direct Reading: External 12-15 Vdc
Current Drain: 23 mA. Measuring, 0.6 mA. Sleep Mode

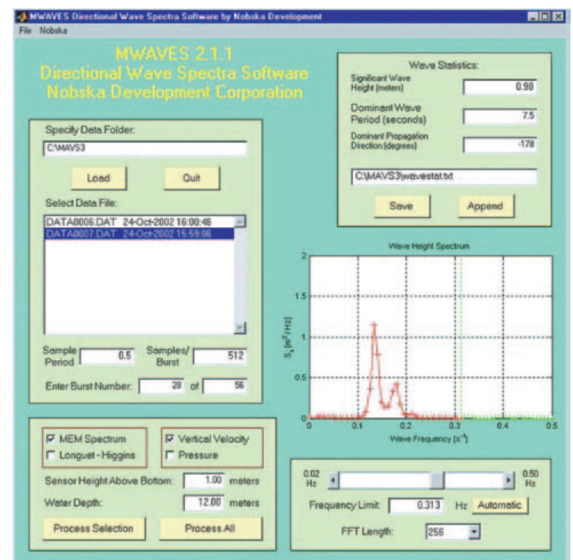

SWALE TECHNOLOGIES Ltd

Unit 51G, Rm48 Whitehill & Bordon Enterprise Park, Budds Lane, Bordon, GU35 0FJ, UK
Tel: +44 (0)1420 473334 Email: Sales@swaletechnologies.com www.swaleocean.co.uk